

# Tazetta

## MT5 task light

### MT5 base model includes:


- Slim, energy efficient T5 fluorescent 3500K lamp
- Standard normal power factor, electronic ballast
- 9° black power cord with 90° plug, sw rotation, center of fixture
- Black rocker switch, 2 position, center of fixture
- Prismatic lens
- UV stable silver reflector
- Cord management clip
- Mounting hardware package - must specify
- Light Corporation standard colors
- UL and CUL listed



Base Number	Suggested Shelf Size	Actual Length	Lamp Wattage
MT5 13	24"	12.97"	8
MT5 24	30"-36"	23.23"	14
MT5 36	42"-48"	35.04"	21
MT5 48	54"-60"	46.86"	28
MT5 60	72"	58.66"	35

For more environmentally friendly options consider:

- **ELE** - high power factor (high performance) electronic ballast for a utility friendly lighting system.
- **OS** - occupancy sensor reduces the amount of time the lights remain on thus reducing energy usage and costs.
- **DIM** - Consider adding a dimming feature for a customizable solution

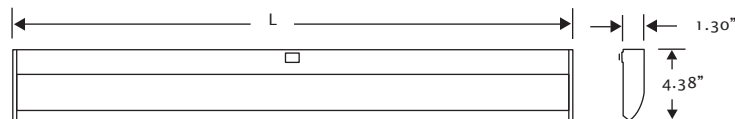

### Specifying notes:

- Cord location on the MT5 13 and MT5 24 is left of center.
- Switch location on the MT5 13 and MT5 24 is left of center.
- The field interchangeable cord (FIC) is not available on the MT5 fixtures as center cord is standard. If left or right is needed it must be specified.
- When specifying the daisy chain (DC) option for the MT5, specify one DCP (power cord fixture), up to 3 DCJ (jumper cord fixture), and one DCE (end fixture) - maximum total of 5 fixtures. See page 50 for more information.
- The power fixture in a daisy chain run can be specified as independent switching (DCP) or master control (MCDPCP).
- The DCE has one jumper cord with male plug to complete the daisy chain run. Length of jumper cord must be specified.
- The DCP is available with a 90°, sw rotation fused plug only.
- All daisy chain fixtures are only available with black cords.
- One cord clip is included with each MT5 fixture; two cord clips are included with each MT5 daisy chain fixture. For additional cord management, see options on next page.
- The occupancy sensor (OS) option is not available for the MT5 13.
- The occupancy sensor (OS) automatically includes the high power factor electronic ballast option (ELE).
- The dimming option (CRD) is not available on the MT5 13
- Mounting options include spring bars for metal shelf, tek screws for metal screw mount, or wood screws for wood or laminate shelves. See pages 56-57 for manufacturer's cross reference codes.
- When specifying metallic colors on the MT5, note that the end caps will be a non-metallic accent color.
- Cord covers are available in black (209), gray taupe (228), light tone (063), stone gray (062) and soft white (061); color code must be specified with size of cord cover.

# Tazetta

## MT5 task light


### MT5 base model prices

Base Number	Suggested Shelf Size	Actual Length	List Price
MT5 13	24"	12.97"	\$ 118.00
MT5 24	30"-36"	23.23"	127.00
MT5 36	42"-48"	35.04"	142.00
MT5 48	54"-60"	46.86"	159.00
MT5 60	72"	58.66"	176.00

**Note:** Suggested shelf size is based on the length of the task light. For assistance in determining size of shelf and brackets needed, refer to pages 56-57.

#### Option exceptions for MT5

OS - not available on MT5 13  
 CRD - not available on MT5 13  
 OS - refer to page 52 for usage information

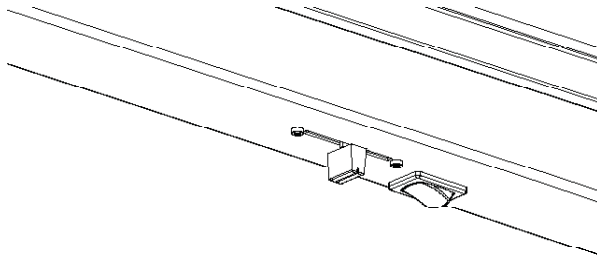

#### Cord cover color code

Finish	Code
Black	209
Gray taupe	228
Light tone	063
Stone gray	062
Soft white	061

### How to specify the MT5 task light

Example MT5 36 ELE BW 018 ST90

- base number
- hpf electronic ballast
- batwing lens
- paint finish
- mounting code

### MT5 option prices

Option	Description	Code	List Price
<b>Lamp:</b>	4100K	TRI41	\$ 0.00
<b>Ballast:</b>	High performance / High power factor electronic	ELE	40.00
<b>Cord exit:</b>	Left hand	LH	6.00
	Right hand	RH	6.00
	Hardwire	HW	0.00
<b>Cord rotation:</b>	Straight plughead	SP	0.00
<b>Cord color:</b>	Gray	SPGR	8.00
	Neutral	SPNL	8.00
<b>Interconnect:</b>	Power (Independent switching)	DCP	46.00
<b>Daisy chain</b>	Power (Master control)	MCDPCP	46.00
	Jumper cord 24" fixture	DCJ24	26.00
	Jumper cord 45" fixture	DCJ45	26.00
	Jumper cord 56" fixture	DCJ56	26.00
	Jumper cord 76" fixture	DCJ76	26.00
	End line fixture 24" jumper	DCE24	26.00
	End line fixture 45" jumper	DCE45	26.00
	End line fixture 56" jumper	DCE56	26.00
	End line fixture 76" jumper	DCE76	26.00
<b>Sensor:</b>	Occupancy sensor	OS	101.00
<b>Dimming:</b>	Continuous range dimming	CRD	75.00
<b>Lens:</b>	Linear prismatic (batwing)	BW	10.00
<b>City code:</b>	Fused plug -sw rotation	CHC9SW	48.00
<b>(Chicago)</b>	Fused plug -straight	CHC9ST	48.00
<b>Cord manager:</b>	Horizontal	CM1	3.00
	2- 2" vertical	CM2	3.00
	12" vertical	CM3	3.00
	Bag of 50 horizontal (CM1)	CM4	37.00
<b>Cord cover:</b>	24" cover (add color code)	CMC24	13.00
	48" cover (add color code)	CMC48	21.00

When choosing options refer to pages 48-53 to verify proper use.

- Specify base number for appropriate shelf size.
- Select option code from list.
- Select option code from list.
- Select paint finish from page 54.
- Select code for manufacturer and system name of unit that the light will be mounting in, pages 56-57.

If manufacturer and system name code is not listed, identify them on your purchase order and a Light Corporation customer service rep will contact you on availability.

Call Light Corporation customer service to place an order, 1-800-544-4899.  
 Prices are subject to change.